

VINYL ROLLS



DIGITALLY PRINTED



MAKE
YOURSELF
AT HOME


Moonlight Daisies
COVER: Coffee Time

DIGITALLY PRINTED VINYL ROLLS THE FUTURE STARTS HERE

Forever developing breakthrough technology just for you. Our new digital printing process provides you with endless possibilities in terms of design, which cannot be achieved with conventional printing techniques.

With traditional printing techniques you always have a visible repeat in the pattern which can be perceived as artificial, whereas with digital **you can truly imitate the continuous patterns** you can obtain with modular floors such as lvt, laminate or parquet.

Discover our three revolutionary new approaches to design, in vinyl floor coverings. You can either choose from our standard collection **Skyline**, where the focus lies on **large tiles** and **long planks** which are so far unseen in cushion vinyl, **Moonlight** which shows elegant, warm as well as bold designs. Or you can opt for the **WOW** concept where our design team will develop **tailor-made designs** just for you.

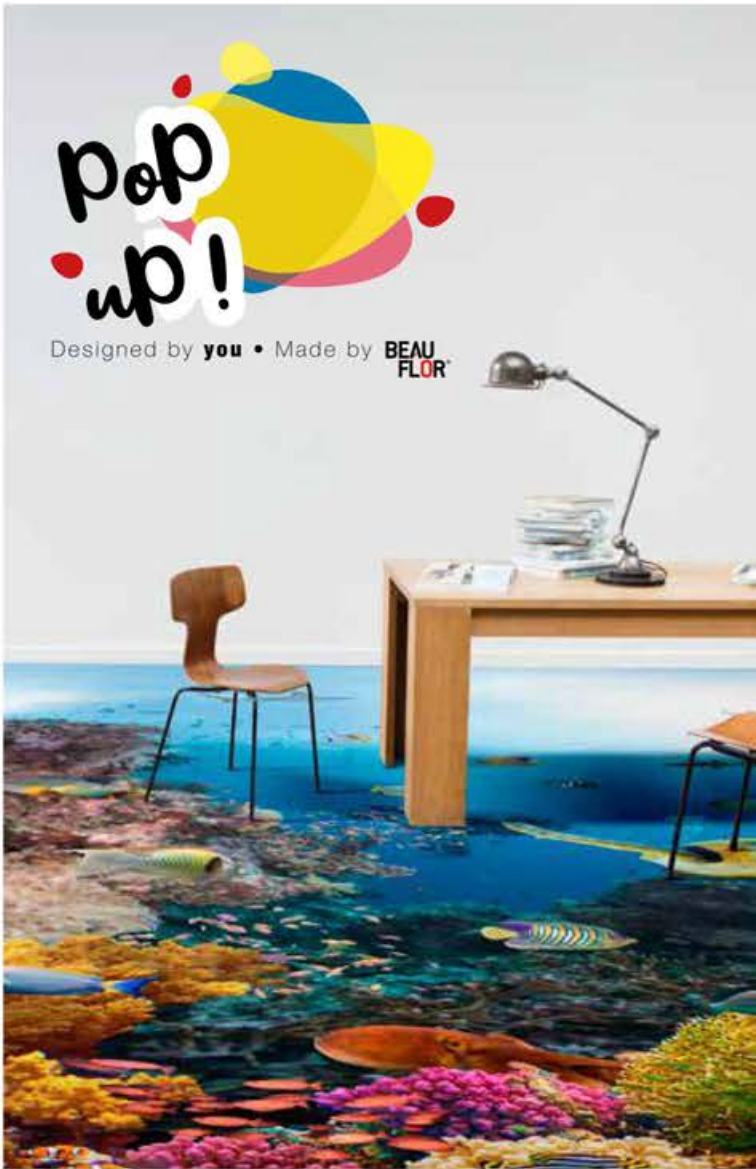



CONTENTS

STANDAARD

Moonlight	6
Olympus	18
Skyline	30

CUSTOM MADE

Pop-Up	44
Impakt	44
Absolute	44







The Moonlight collection of vinyl flooring was inspired by the latest trends. Specially created by our in-house designers, it is an exclusive collection for residential use you won't find anywhere else. HD printing technology allows us the liberty to expand to new horizons.

The way we print ensures no repetition. Irregular? That's an advantage when it comes to flooring. It's the best way to pull off a natural-looking floor. Our Moonlight Collection offers you looks you can't get with traditional printing processes.



Moonlight **Caracterra Red**

2m: 50044525
4m: 50044225



Moonlight **Cobble**

2m: 50043024
4m: 50040960



Moonlight **Galway Grey**

2m: 50044528
4m: 50044228



Moonlight **Willow**

2m: 50043046
4m: 50040944



Moonlight **Sonora oak Natural**

2m: 50044532
4m: 50044226




Moonlight **Catalpa**

2m: 50043033
4m: 50040942



Moonlight **Hamburg Brown**

2m: 50044529
4m: 50044227

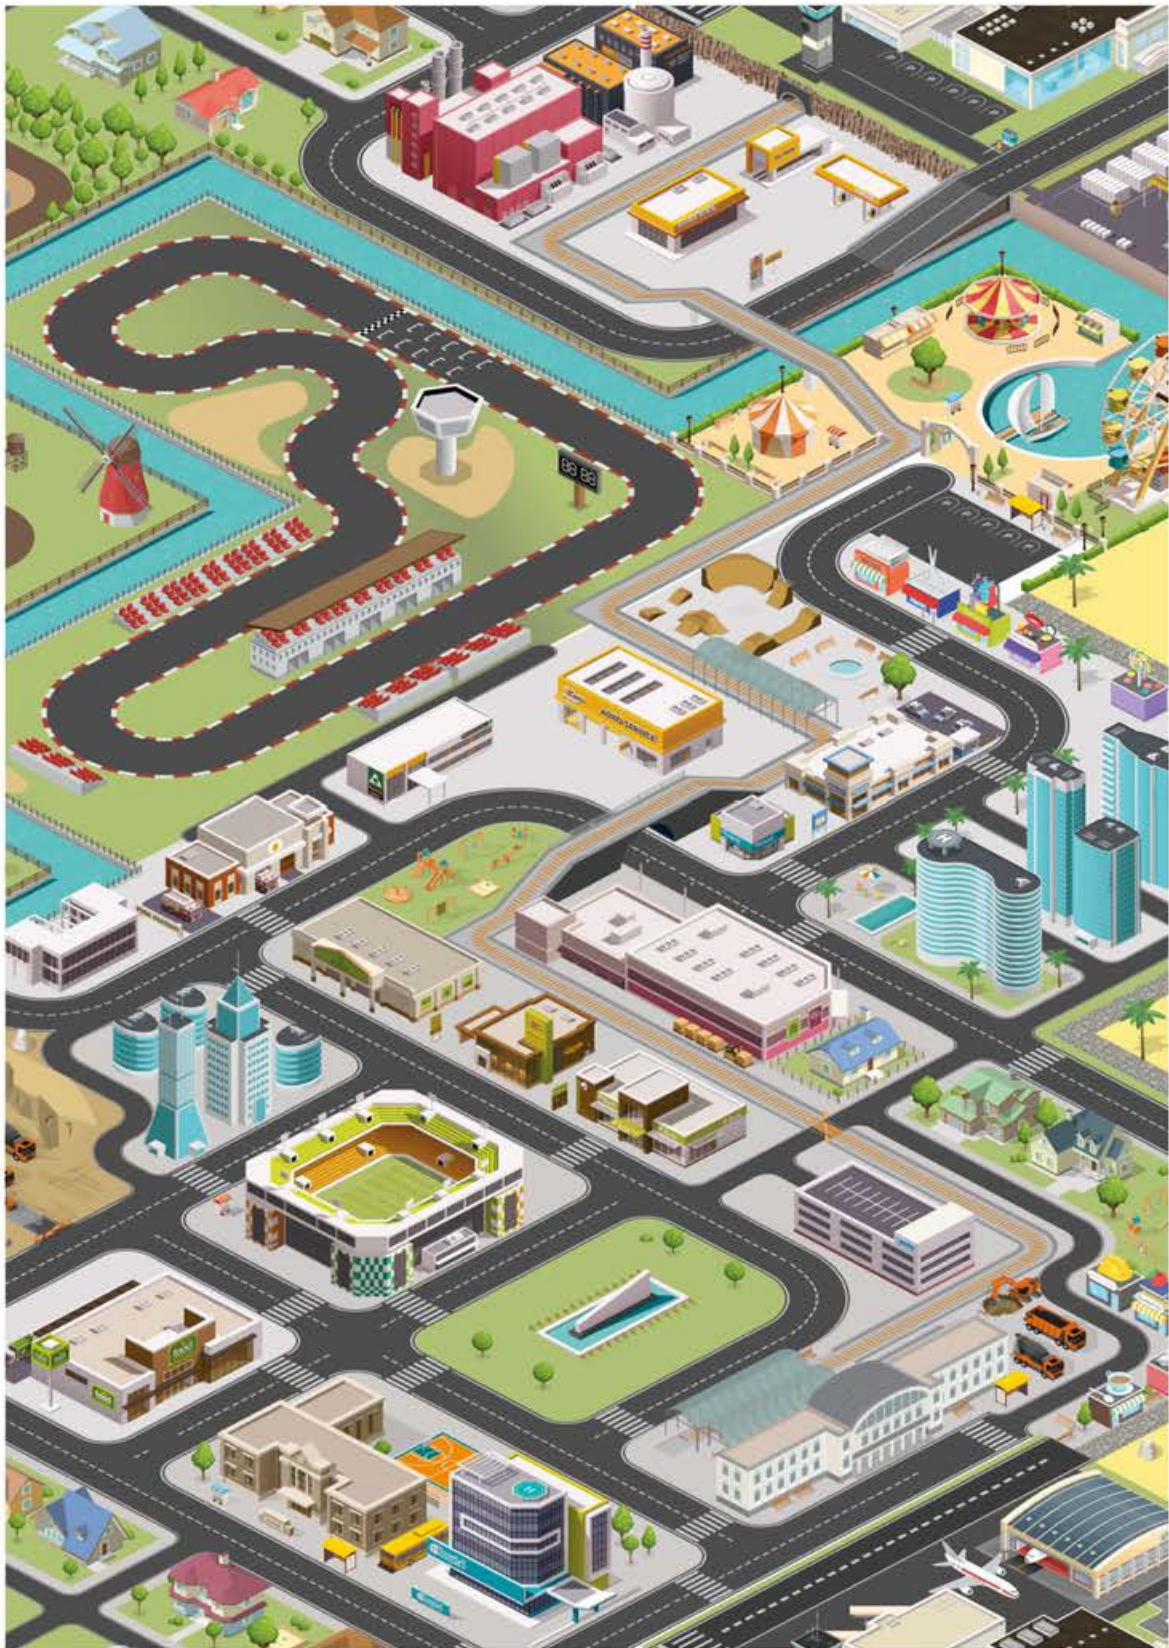

Moonlight **Street**

2m: 50041619
4m: 50040961



Moonlight **Street**



Moonlight **OSB**

2m: 50044531

4m: 50044224



Moonlight **Koi**

2m: 50044530

4m: 50044 221



Moonlight **Sand**



Moonlight **Sand**

2m: 50043041
4m: 50040959



Moonlight Romance



Moonlight **Romance**

2m: 50040951
4m: 50040959



PRODUCT INFORMATION

Norm	EN ISO 26986		
Intensity of use	ISO 10874 (EN 685)		Class 22 *
Total Thickness	EN ISO 24346 (EN 428)		2,50 mm
Wearlayer	EN ISO 24340 (EN 429)		0,25 mm
Abrasion group	EN 660-2		T Class
Total weight	EN ISO 23997 (EN 430)		1360 g/m2
Standard width	EN ISO 24341 (EN 426)		2 - 4 m
Standard length	EN ISO 24341 (EN 426)		+/- 25 m

TECHNICAL INFORMATION

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40 %
Curling	EN ISO 23999		≤ 8 mm
Light stability	EN ISO 105 B02		≥ 6/7 degree
Residual indentation	EN ISO 24343-1 (EN 433)		0,35 mm
Impact sound improvement	EN ISO 717/2		Δ Lw 16 dB
Dynamic coefficient of friction	EN 13893		> 0,6
Slip resistance (ramp test with oil)	DIN 51130		R10 scale
Reaction to fire Report number ---- VNL F 031380.4	EN 13501-1		Bfl/S1 class
Underfloor heating	EN 12667		Suitable
Thermal resistance	ISO 8302		0,027 m²/Kw
Thermal conductivity	EN 12524		0,09 W/(m.K)
Chemical resistance / effect of stains	EN 423 ISO 26987		Resistant
Static Electrical Propensity	EN 1815		< 2kV On concrete

* 22 General Domestic



Moonlight OSB



Evergreen Oak 669M

OLYMPUS

only by **BEAU
FLOR®**

OLYMPUS

only by **BEAU
FLOR**



Country Fishbone 161L

2m: 50044996
4m: 50044975



Country Fishbone 261m

2m: 50044997
4m: 50044976



Country Fishbone 696M

2m: 50044999
4m: 50044977



Country Fishbone 261M





Evergreen Oak 116L

2m: 50045001
4m: 50044978



Evergreen Oak 669M

2m: 50045004
4m: 50044980



Evergreen Oak 216M

2m: 50045002
4m: 50044979



Sunrise Oak 169L

2m: 50045010
4m: 50044983



Sunrise Oak 619M

2m: 50045012
4m: 50044985



Sunrise Oak 191L

2m: 50045011
4m: 50044984




Sunrise Oak 916M

2m: 50045013
4m: 50044986





Quebec 196M

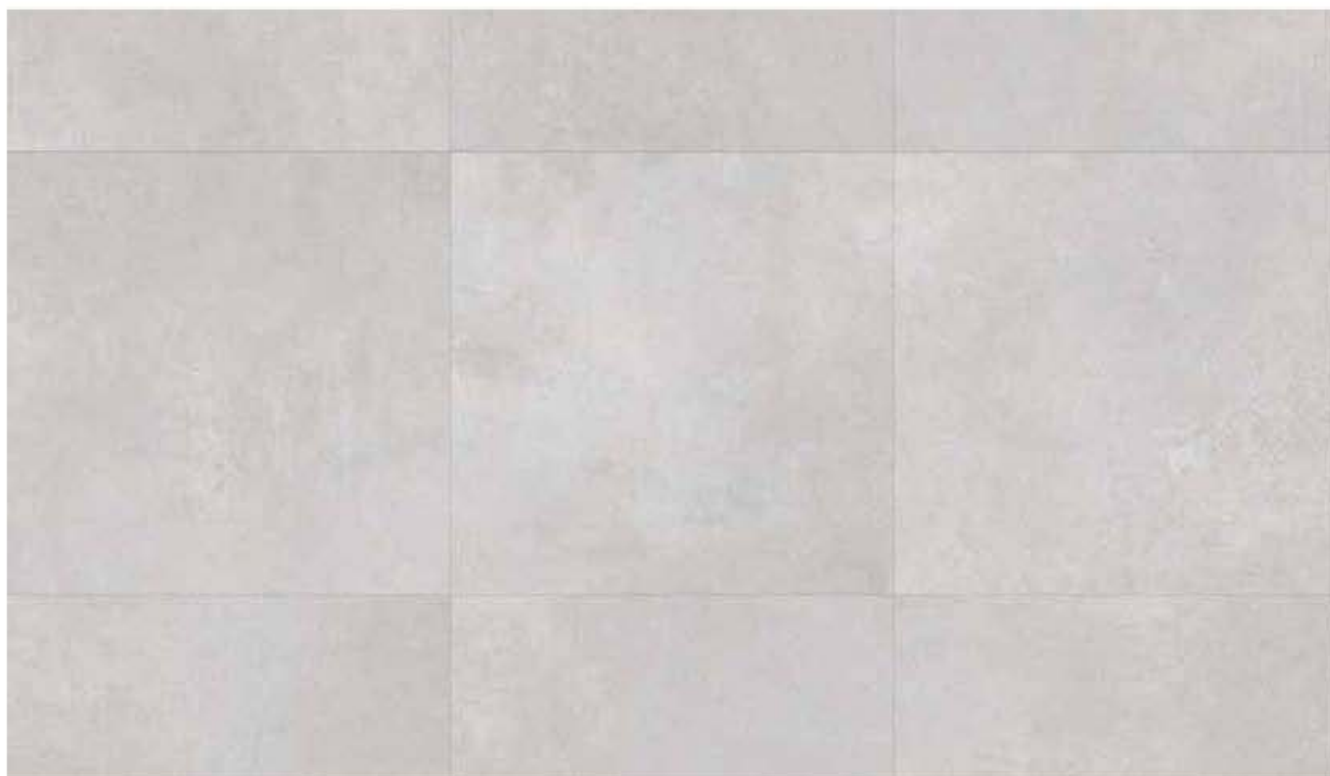

Quebec 196M

4m: 50044981



Quebec 979D

4m: 50044982















OLYMPUS

only by **BEAU
FLOR**

PRODUCT INFORMATION

Norm	EN ISO 26986		
Intensity of use	ISO 10874 (EN 685)		Class 23-32-41 *
Total Thickness	EN ISO 24346 (EN 428)		2,25 mm
Wearlayer	EN ISO 24340 (EN 429)		0,60 mm
Abrasion group	EN 660-2		T class
Total weight	EN ISO 23997 (EN 430)		2330 g/m2
Standard width	EN ISO 24341 (EN 426)		4 m**
Standard length	EN ISO 24341 (EN 426)		+/- 30 m

TECHNICAL INFORMATION


Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40 %
Curling	EN ISO 23999		≤ 8 mm
Light stability	EN ISO 105 B02		≥ 6 degree
Residual indentation	EN ISO 24343-1 (EN 433)		≤ 0,20 mm
Impact sound improvement	EN ISO 717/2		Δ Lw 10 dB
Dynamic coefficient of friction	EN 13893		> 0,6
Slip resistance (ramp test with oil)	DIN 51130		R10 scale
Reaction to fire <small>Report number ---- VNL F 031380.4</small>	EN 13501-1		Bfl/S1 class
Underfloor heating	EN 12667		Suitable
Thermal resistance	ISO 8302		0,014 m²/Kw
Thermal conductivity	EN 12524		0,16 W/(m.K)
Chemical resistance / effect of stains	ISO 26987 (EN 423)		Resistant
Static Electrical Propensity	EN 1815		< 2kV On concrete
Delamination test (peel resistance)	EN ISO 24345		≥ 50N/50mm
Furniture leg resistance	ISO 16581 (EN 424)		no damage
Castor chair resistance	EN ISO 4918		Suitable (type wheel H)

* Class 23 High domestic
Class 32 Moderate commercial use
Class 41 Light industrial use

** 2m (to be ordered in even numbers - min 4 rolls) - 4m (min 2 rolls)



Sunrise Oak 619M

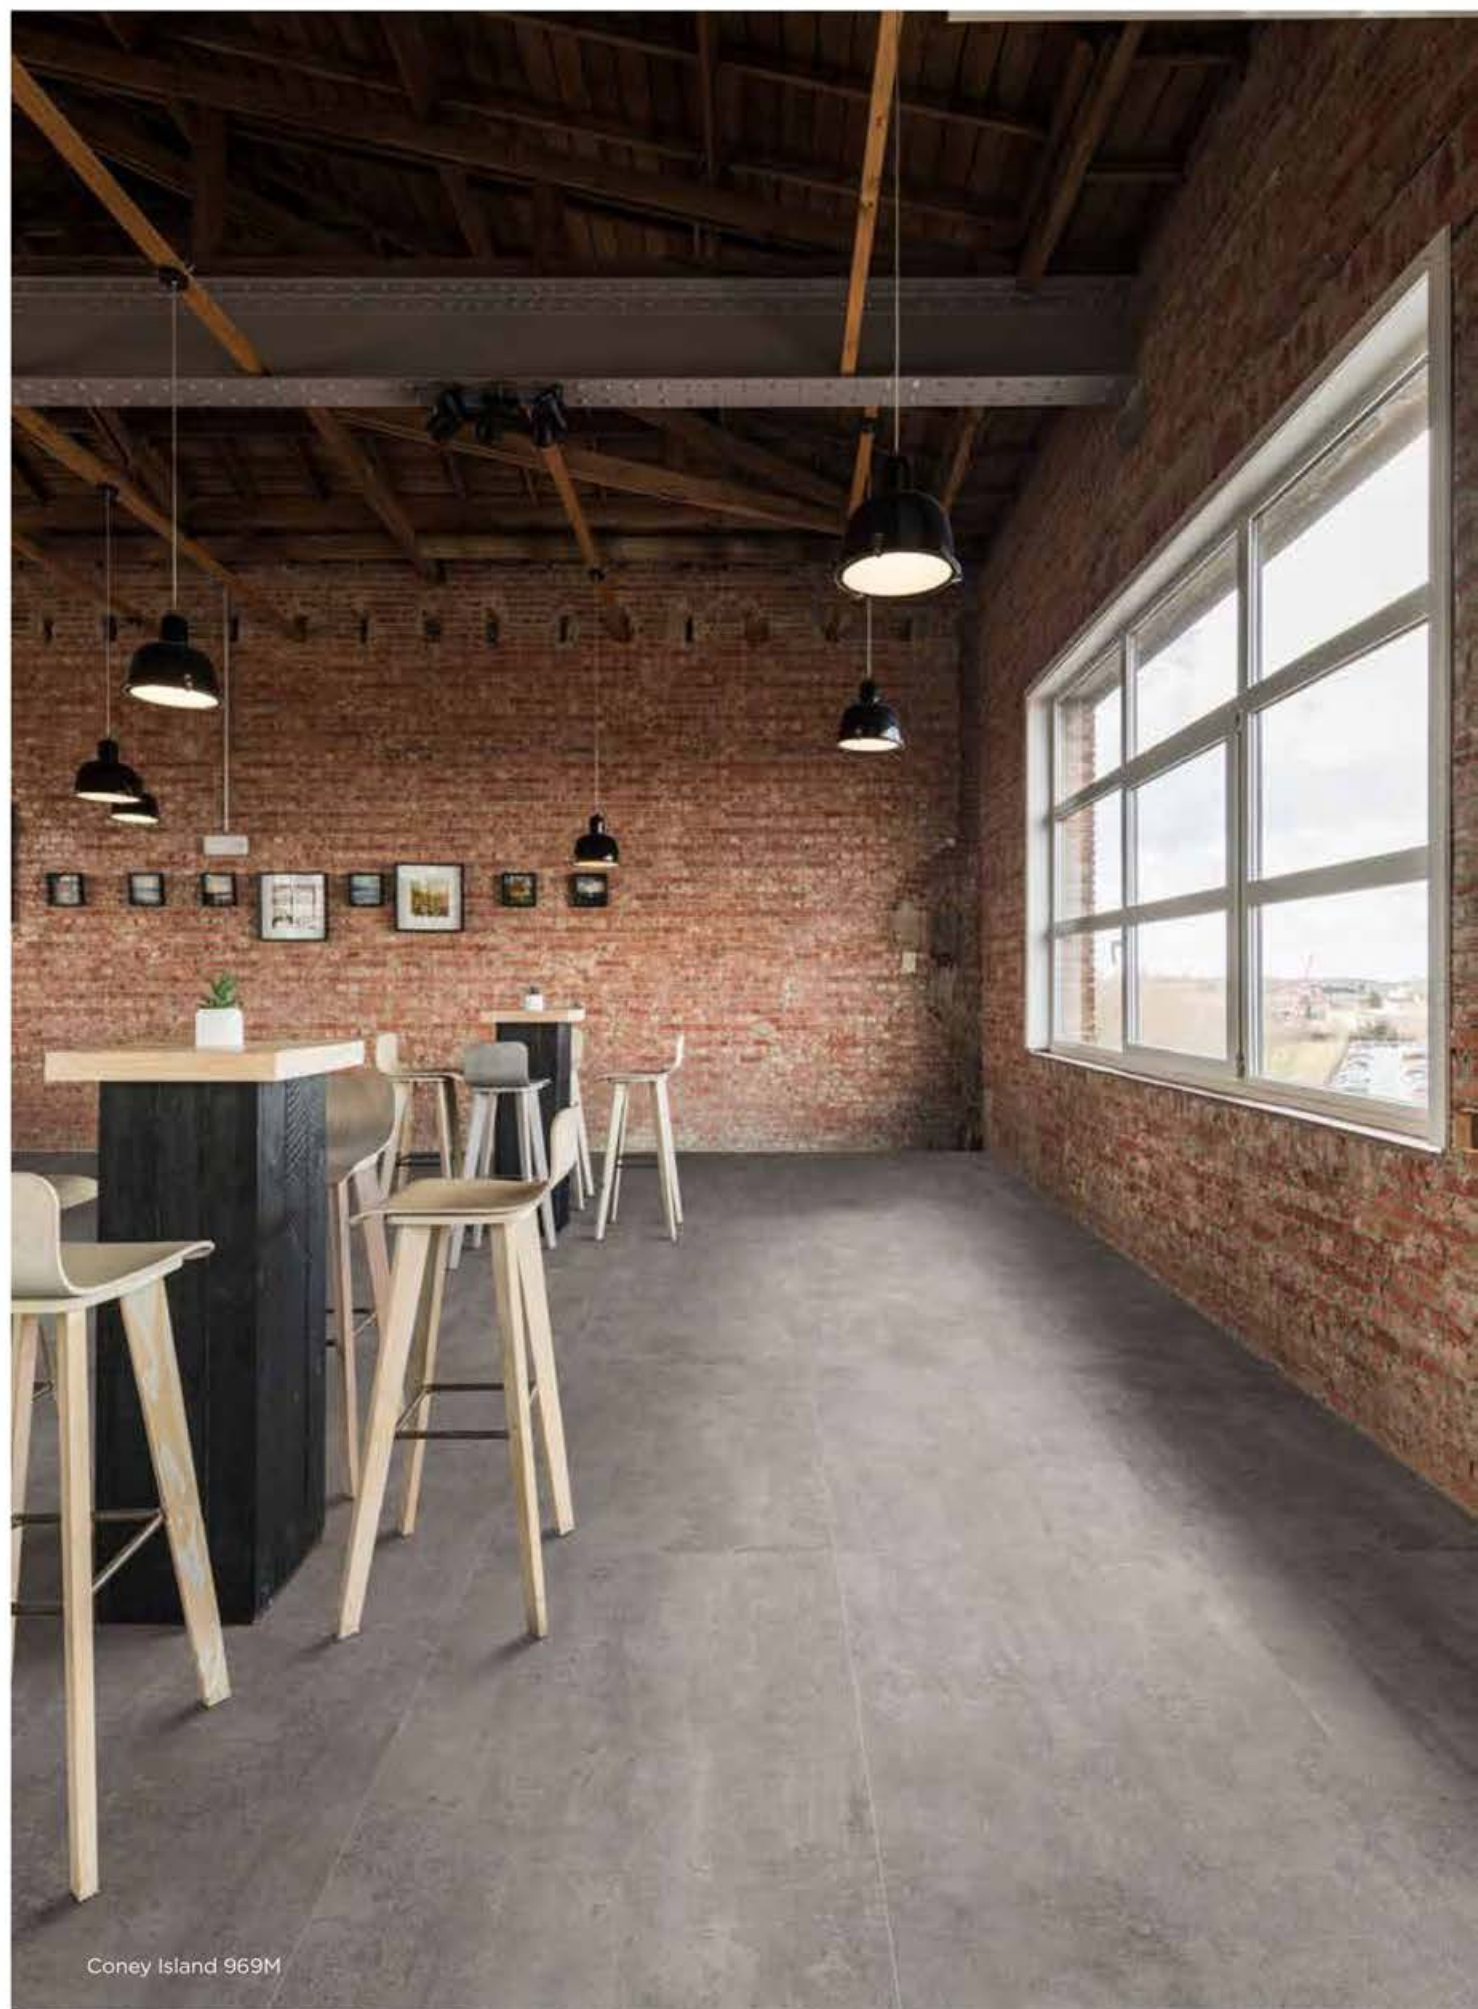

Coney Island 969M

SKYLINE

only by **BEAU
FLOR**

An exclusive designer collection with elegant and sophisticated colour and detail never seen before, produced with Digital Printing Technology.

The stunning Skyline collection made with the latest state of the art digital printing techniques, generating a selection of exclusive wood planks, marble and tile designs. This collection is available in 4m wide rolls which offer a new dimension in colour definition, design & performance giving you super strong qualities and durability.

Our advanced digital printing technology has provided our design team with the opportunity to develop striking designs with extra large designs sizes and no visible repeats. This cannot be achieved with conventional printing techniques.



Giant Oak

Our Giant Oak range has a distinctive grain effect in a stunning elegant colour palette. Nothing compares to the look of luxurious oak flooring. With the choice of 7 shades and large size planks you can be sure to find a colour to suit any interior design space.

Roll 4 m wide

Plank Size: 200 x 22.2 cm



Giant Oak 669M
4m: 50038391



Giant Oak 649M
4m: 50038390



Giant Oak 639M
4m: 50038385



Giant Oak 116M
4m: 50038389



Giant Oak 919M
4m: 50038386



Giant Oak 106L
4m: 50038387



Giant Oak 979M
4m: 50038388




Giant Oak 619M
4m: 50038392

200 cm



Giant Oak 116M

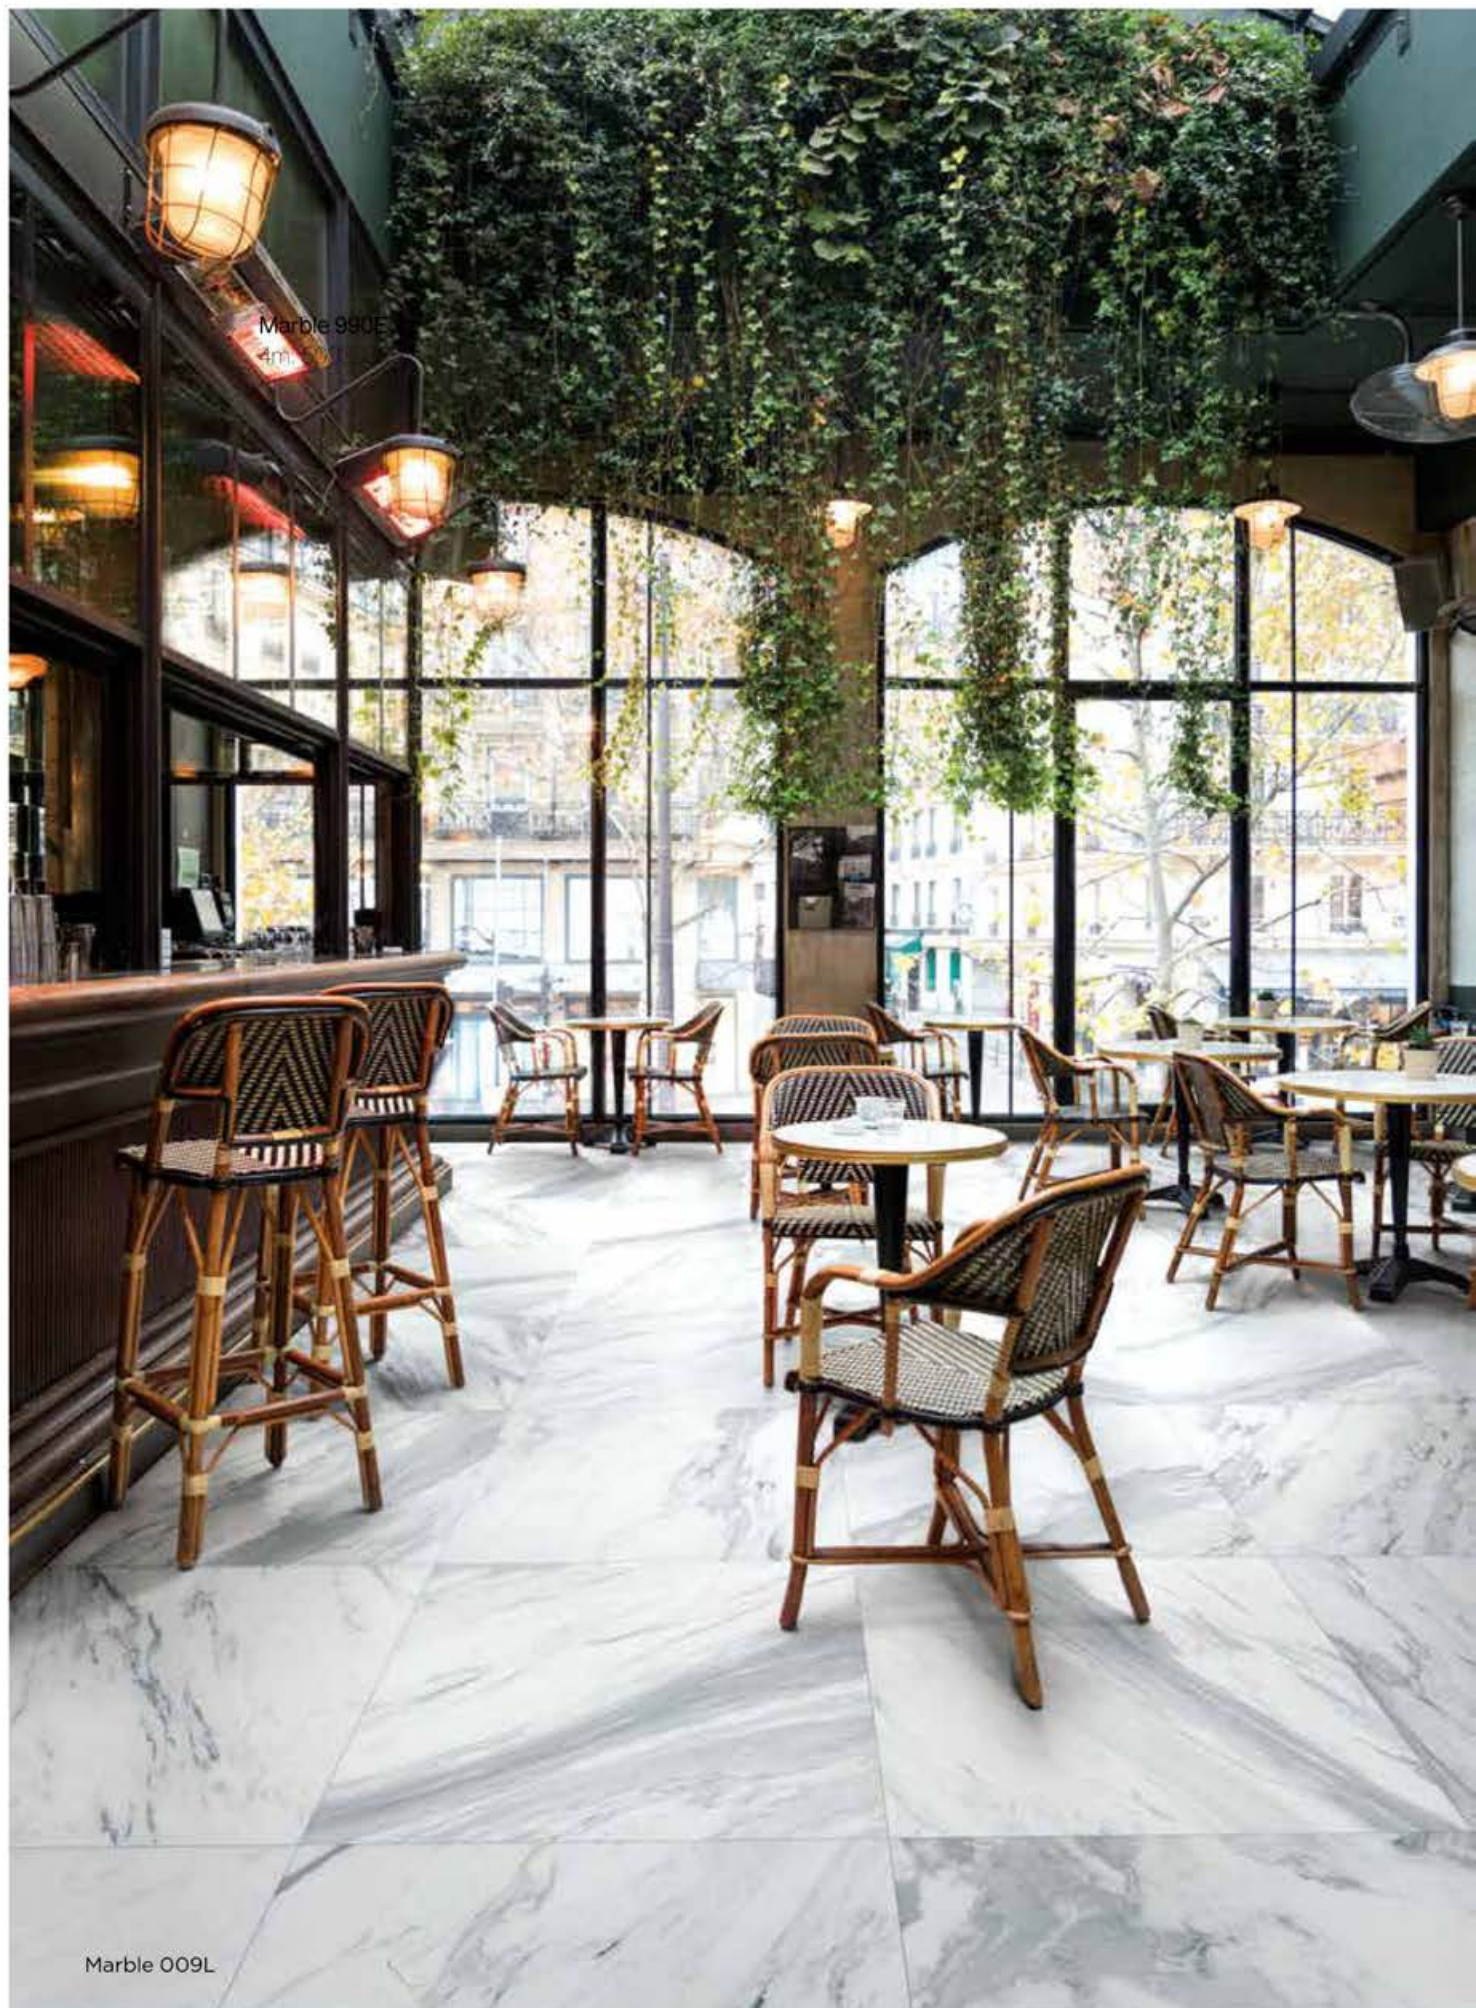




Marble

This timeless marble design authentically recreates the natural marble found in Volakas, Greece. Available in two tones, black and white. Marble creates a feeling of luxury which is equally at home in a modern or traditional setting.

Roll 4 m wide

Tile Size: 80 x 80 cm

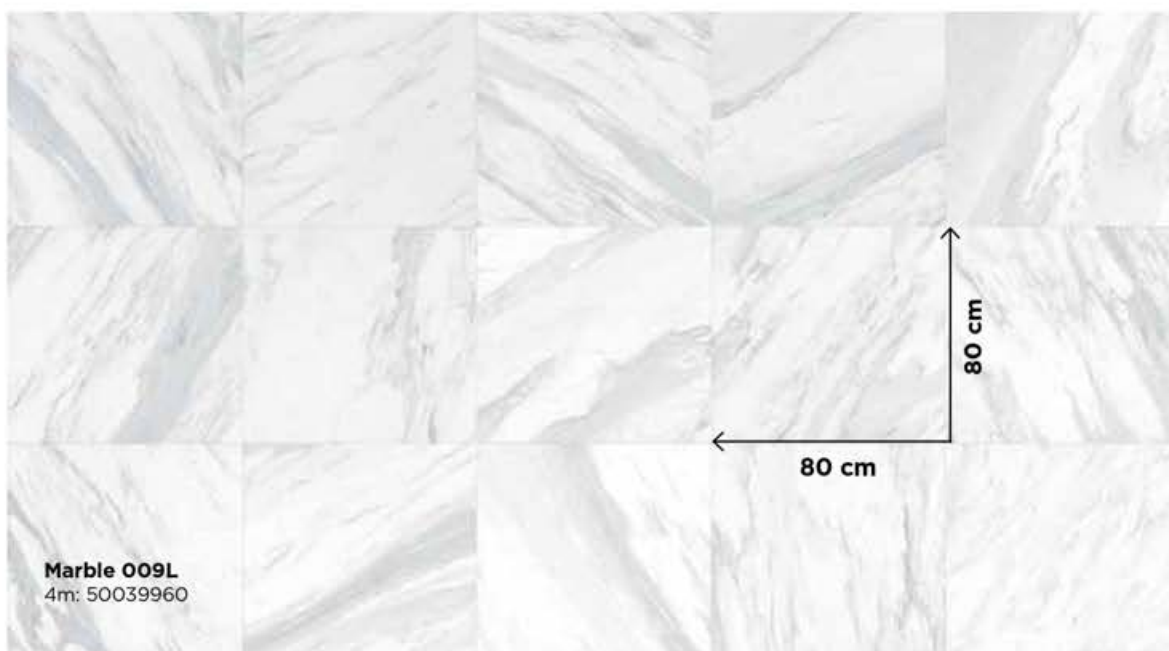





Marble 990E



Roll 4 m wide

Coney Island

Polished concrete is much loved by interior designers because of the way it combines strong lines with soft textures. Coney Island is inspired by the iconic concrete structures of the Big Apple. It is available in a palette of five neutral colours in a modern extra large sized tile.

Tile Size: 120 x 66 cm





Coney Island 999D



Victorian Oak 109L



Victorian Oak

With a combination of an **oak plank mixed with authentic Victorian tile** designs gives you the best of both styles rolled into one! This design certainly is a "stand out from the crowd" pattern due to its unique appearance that creates a look to suit modern and traditional tastes at the same time.

Roll 4 m wide

Plank Size: 200 x 22.2 cm



Victorian Oak 109L
4m: 50038384














SKYLINE

only by **BEAU FLOR**

PRODUCT INFORMATION

Norm	ISO 10582		
Intensity of use	ISO 10874 (EN 685)		Class 34-43 *
Total Thickness	EN ISO 24346 (EN 428)		2,00 mm
Wearlayer	EN ISO 24340 (EN 429)		0,70 mm
Abrasion group	EN 660-2		T Class
Total weight	EN ISO 23997 (EN 430)		2800 g/m ²
Standard width	EN ISO 24341 (EN 426)		4** m
Standard length	EN ISO 24341 (EN 426)		+/- 22 m

TECHNICAL INFORMATION

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40 %
Curling	EN ISO 23999		≤ 8 mm
Light stability	EN ISO 105 B02		≥ 6 degree
Residual indentation	EN ISO 24343-1 (EN 433)		0,1 mm
Impact sound improvement	EN ISO 717/2		Δ Lw 6 dB
Dynamic coefficient of friction	EN 13893		> 0,6
Slip resistance (ramp test with oil)	DIN 51130		R10 scale
Reaction to fire <small>Report number ---- VNL F 031380.4</small>	EN 13501-1		Bfl/S1 class
Underfloor heating	EN 12667		Suitable
Thermal resistance	ISO 8302		0,014 m ² /Kw
Thermal conductivity	EN 12524		0,14 W/(m.K)
Chemical resistance / effect of stains	EN 423 ISO 26987		Resistant
Static Electrical Propensity	EN 1815		< 2kV On concrete
Delamination test (peel resistance)	EN ISO 24345		≥ 50N/50mm
Furniture leg resistance	ISO 16581 (EN 424)		no damage
Castor chair resistance	EN ISO 4918		Suitable (type wheel H)

* 34 Commercial very heavy
43 Industrial heavy

** Check individual ref. for available widths



Giant Oak 106L

Unique

Prints

Your tailor-made designs are available from 2 rolls per design. All designs are developed for 4m wide rolls only.

DISCOVER OUR ENDLESS DESIGN
POSSIBILITIES

**Available
in three product
constructions**



Designed by **you** • Made by **BEAU FLOR**

Suitable for domestic use

IMPACT **42**

Designed by **you** • Made by **BEAU FLOR**

Suitable both for domestic
& contract applications

ABSOLUTE **43**

Designed by **you** • Made by **BEAU FLOR**


Suitable for full contract use









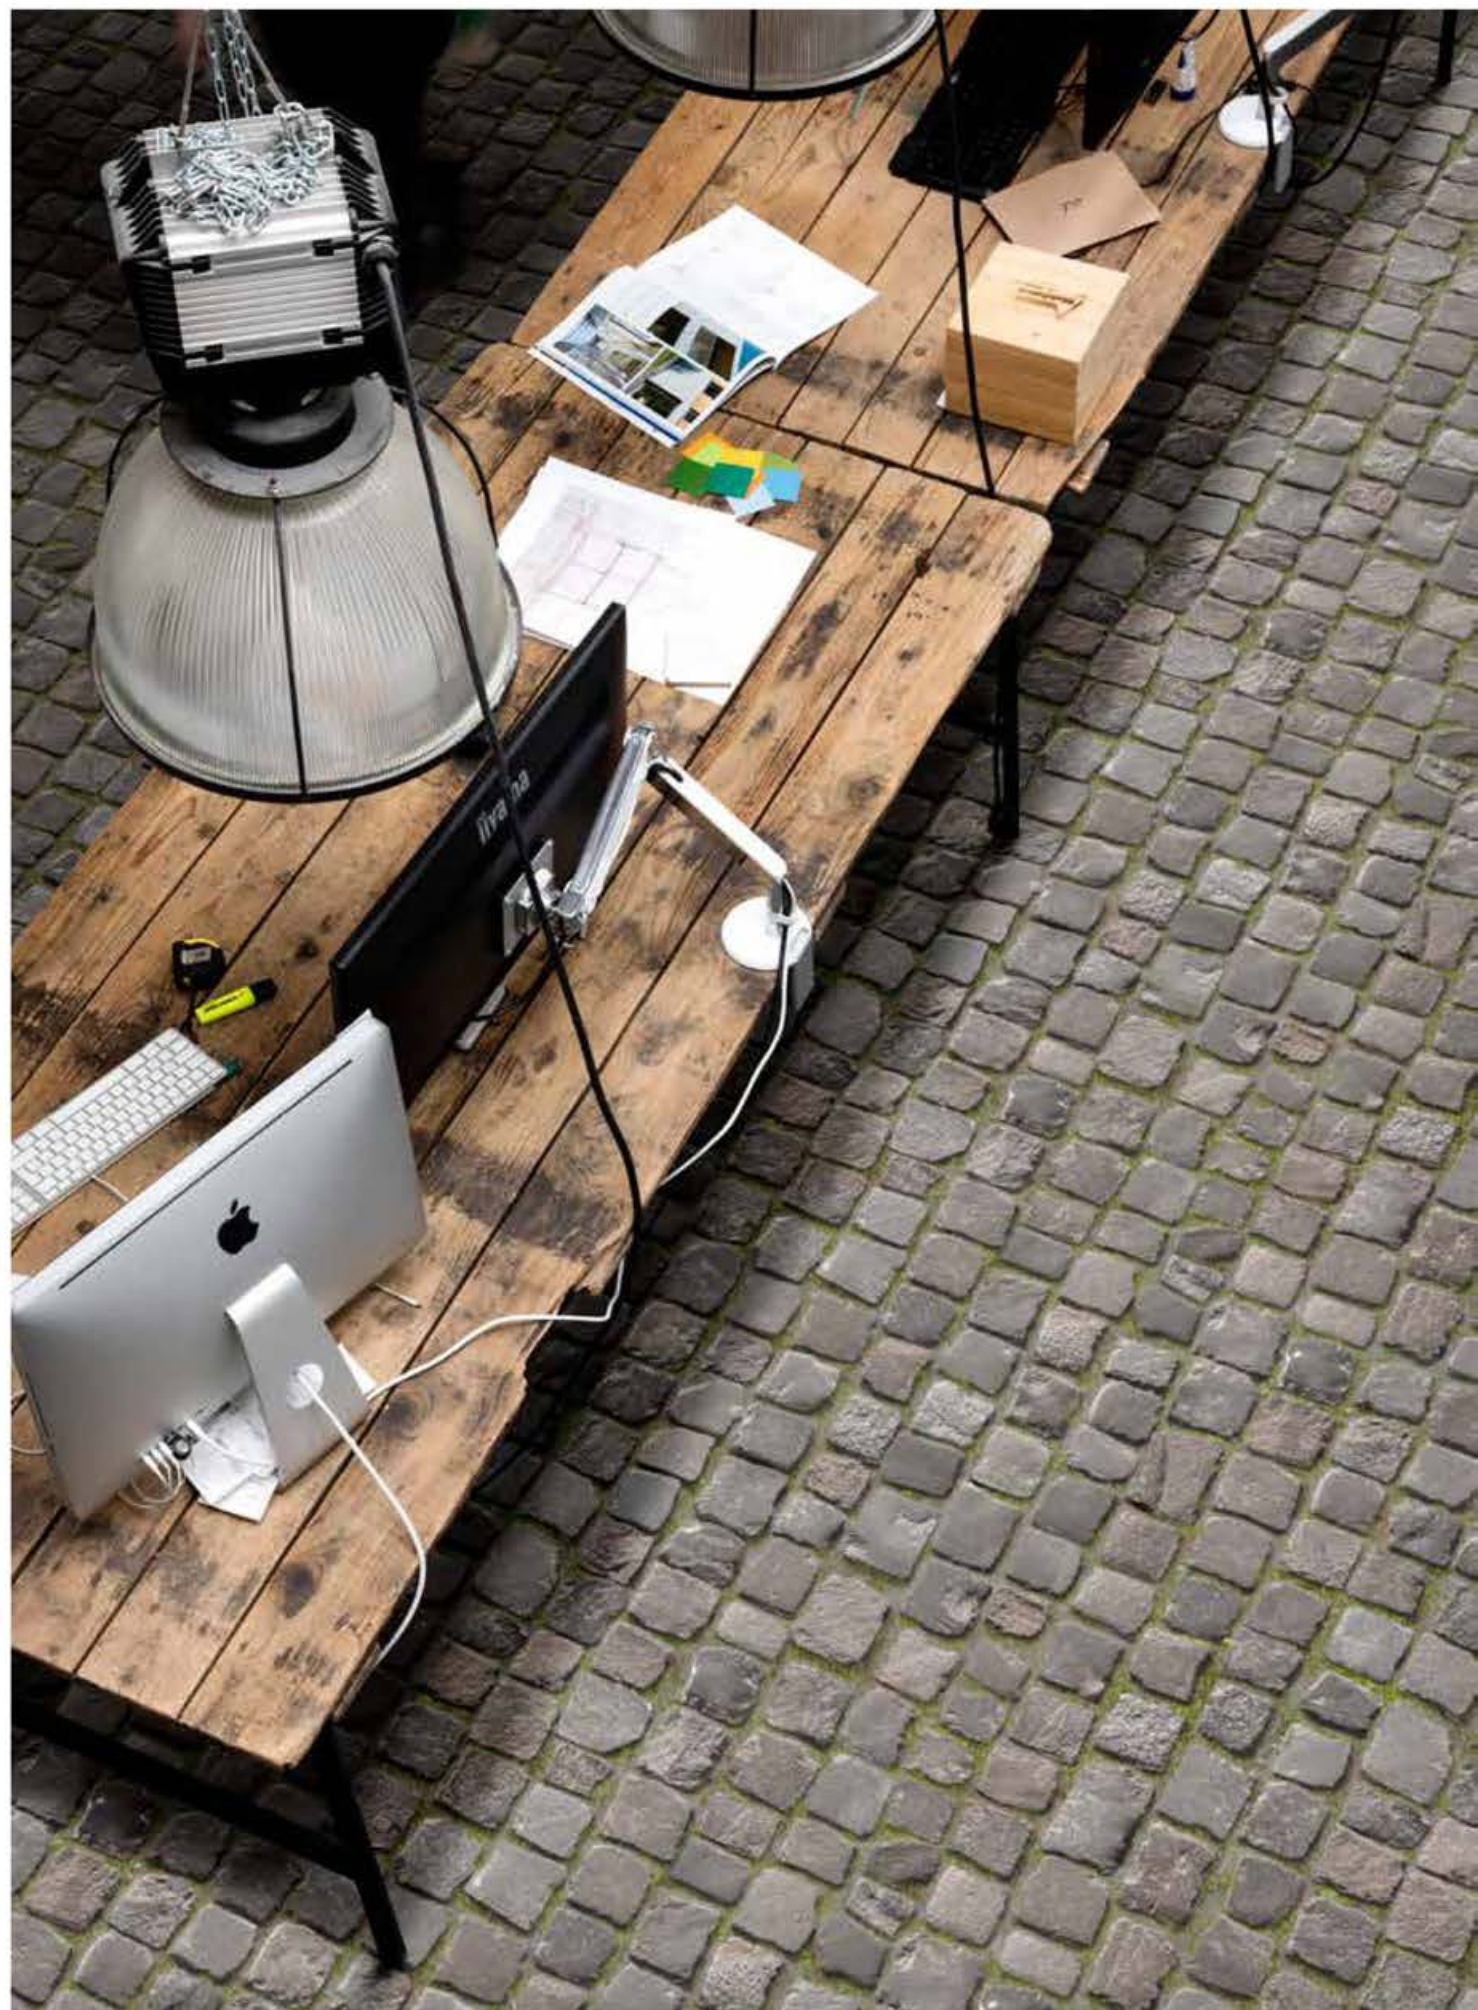

DOMESTIC



Designed by **you** • Made by **BEAU FLOR**

PRODUCT INFORMATION

Norm	EN ISO 26986		
Intensity of use	ISO 10874 (EN 685)		Class 22 *
Total Thickness	EN ISO 24346 (EN 428)		2,50 mm
Wearlayer	EN ISO 24340 (EN 429)		0,25 mm
Abrasion group	EN 660-2		T Class
Total weight	EN ISO 23997 (EN 430)		1360 g/m2
Standard width	EN ISO 24341 (EN 426)		2 - 4 m**
Standard length	EN ISO 24341 (EN 426)		+/- 25 m

TECHNICAL INFORMATION

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40 %
Curling	EN ISO 23999		≤ 8 mm
Light stability	EN ISO 105 B02		≥ 6/7 degree
Residual indentation	EN ISO 24343-1 (EN 433)		0,35 mm
Impact sound improvement	EN ISO 717/2		Δ Lw 16 dB
Dynamic coefficient of friction	EN 13893		> 0,6
Slip resistance (ramp test with oil)	DIN 51130		R10 scale
Reaction to fire Report number — VNL/F 031380.4	EN 13501-1		Bfl/S1 class
Underfloor heating	EN 12667		Suitable
Thermal resistance	ISO 8302		0,027 m²/Kw
Thermal conductivity	EN 12524		0,09 W/(m.K)
Chemical resistance / effect of stains	EN 423 ISO 26987		Resistant
Static Electrical Propensity	EN 1815		< 2kV On concrete

* 22 General Domestic

** 2m (to be ordered in even numbers - min 4 rolls) - 4m (min 2 rolls)

CONTRACT & DOMESTIC















I M P A K T 42

Designed by **you** • Made by **BEAU FLOR®**

PRODUCT INFORMATION

Norm	EN ISO 26986		
Intensity of use	ISO 10874 (EN 685)		Class 23-32-41 *
Total Thickness	EN ISO 24346 (EN 428)		2,25 mm
Wearlayer	EN ISO 24340 (EN 429)		0,60 mm
Abrasion group	EN 660-2		T class
Total weight	EN ISO 23997 (EN 430)		2330 g/m2
Standard width	EN ISO 24341 (EN 426)		2 - 4 m**
Standard length	EN ISO 24341 (EN 426)		+/- 30 m

TECHNICAL INFORMATION

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40 %
Curling	EN ISO 23999		≤ 8 mm
Light stability	EN ISO 105 B02		≥ 6 degree
Residual indentation	EN ISO 24343-1 (EN 433)		≤ 0,20 mm
Impact sound improvement	EN ISO 717/2		Δ Lw 10 dB
Dynamic coefficient of friction	EN 13893		> 0,6
Slip resistance (ramp test with oil)	DIN 51130		R10 scale
Reaction to fire Report number ---- VNL F 031380.4	EN 13501-1		Bfl/S1 class
Underfloor heating	EN 12667		Suitable
Thermal resistance	ISO 8302		0,014 m²/Kw
Thermal conductivity	EN 12524		0,16 W/(m.K)
Chemical resistance / effect of stains	ISO 26987 (EN 423)		Resistant
Static Electrical Propensity	EN 1815		< 2kV On concrete
Delamination test (peel resistance)	EN ISO 24345		≥ 50N/50mm
Furniture leg resistance	ISO 16581 (EN 424)		no damage
Castor chair resistance	EN ISO 4918		Suitable (type wheel H)

* Class 23 High domestic
Class 32 Moderate commercial use
Class 41 Light industrial use

** 2m (to be ordered in even numbers - min 4 rolls) - 4m (min 2 rolls)

CONTRACT















ABSOLUTE 43

Designed by **you** • Made by **BEAU FLOR**

PRODUCT INFORMATION

Norm	EN ISO 10582		
Intensity of use	ISO 10874 (EN 685)		Class 34-43 *
Total Thickness	EN ISO 24346 (EN 428)		2,00 mm
Wearlayer	EN ISO 24340 (EN 429)		0,70 mm
Abrasion group	EN 660-2		T Class
Total weight	EN ISO 23997 (EN 430)		2800 g/m2
Standard length	EN ISO 24341 (EN 426)		+/- 22 m
Standard width	EN ISO 24341 (EN 426)		2 - 4 m**

TECHNICAL INFORMATION

Dimensional stability	EN ISO 23999 (EN 434)		≤ 0,40 %
Curling	EN ISO 23999		≤ 8 mm
Light stability	EN ISO 105 B02		≥ 6 degree
Residual indentation	EN ISO 24343-1 (EN 433)		≤ 0,10 mm
Impact sound improvement	EN ISO 717/2		Δ Lw 6 dB
Dynamic coefficient of friction	EN 13893		> 0,6
Slip resistance (ramp test with oil)	DIN 51130		R10 scale
Reaction to fire Report number ---- VNL/F 031380.4	EN 13501-1		Bfl/S1 class
Underfloor heating	EN 12667		Suitable
Thermal resistance	ISO 8302		0,014 m²/Kw
Thermal conductivity	EN 12524		0,14 W/(m.K)
Chemical resistance / effect of stains	ISO 26987 (EN 423)		Good
Static Electrical Propensity	EN 1815		< 2kV On concrete
Delamination test (peel resistance)	EN ISO 24345		≥ 50N/50mm
Furniture leg resistance	ISO 16581 (EN 424)		no damage
Castor chair resistance	EN ISO 4918		Suitable (type wheel H)

* 34 Commercial very heavy
43 Industrial heavy

** 2m (to be ordered in even numbers - min 4 rolls) - 4m (min 2 rolls)



WE LOVE GREEN

At Beauflor, we value the environment in which we do business and the carbon footprint left behind. We aim to reduce, reuse and recycle at every point of operation. Therefore Beauflor has made a measured and conscious decision to only produce vinyl sheet products that pose no unreasonable risk to human health or environment.

All our vinyl sheet products are produced without plasticizers that contain significant impurities of orthophthalic acid/anhydride derived molecules (also known as phthalates). This means that we only use other non-phthalate plasticisers, such as DOTP. DOTP has been evaluated by ECHA (European Chemicals Agency) as a safe product to use due to its excellent toxicological profile.

We produce with known virgin raw materials from trustworthy vendors throughout the world and therefore we guarantee a 100% orthophthalate-free flooring world-wide. Beauflor has committed itself to changing the manufacturing process on its sites and can proudly announce that the production is with non-orthophthalate formulations.



- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers

This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean, renewable energy sources and we actively work towards the constant improvement of energy saving.



E1 means that the level of formaldehyde is inferior to 0.1 ppm (x 0.12 mg/m³ of air)



Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)



100% phthalate free
*for all products
produced from May
2017 onwards



Beauflor has the right flooring for all domestic and public spaces. Beauflor offers a very wide choice of aspects and designs. Discover the full range at:

www.beauflor.com

Non-contractual document. Printing techniques may cause small variations in the colours shown. Beauflor reserves the right to modify its range without notice. Please note that the technical data given could be imprecise and liable to modifications of a technical nature at any time. The information in these documents is valid from 01/01/2018 and Beauflor reserve the right to make changes at any moment and without prior notice. Our technology is constantly evolving, so before carrying out any projects we encourage you to contact us to maintain our highest level of standards. Printing 07/18.





OLYMPUS EVERGREEN OAK 116L



SAY
WOW

**BEAU
FLOR®**
we decorate your floor

BIG Floorcoverings NV, Rijksweg 442
8710 WIELSBEKE - BELGIUM
Tel. +32 (0)56 67 66 11
info@beauflor.com

www.beauflor.com



Beaulieu
International
Group

