



Beaulieu
International
Group

Needle Felt

ISO 9001: 2015 CERTIFIED
ISO 14001: 2015 CERTIFIED

COLLECTION FOREST



Pile content	Polmaterial	Composition des fibres	-	100% PP
Surface aspect	Oberflächenstruktur	Aspect du surface	-	Dilour
Backing	Rücken	Dossier	ISO 2424	Resine + dots
Pile weight	Polgewicht	Poids des fibres	ISO 8543	750 gr/m²
Total weight	Gesamtgewicht	Poids total	ISO 8543	920 gr/m²
Pile height	Polhöhe	Hauteur du velours	ISO 1765	3 mm
Total height	Gesamthöhe	Hauteur totale	ISO 1765	8 mm
Roll length	Länge	Longueur	-	30 m
UV stability	UV-Stabilität	Stabilité UV	-	1500 hours

CONTACT

Sales.BFSEurope@bintg.com
www.beaulieu-needlefelt.com

We reserve the right to alter technical specifications. Protection foil is not suitable in humid conditions.
© Beaulieu International Group

FOREST



1153
Beige
2 m - 4 m



2081
Dark Grey
2 m - 4 m



2216
Lichtgrijs
2 m - 4 m




2236
Antraciet
2 m - 4 m




5539
Blauw
2 m - 4 m



6603
Evergreen
2 m - 4 m

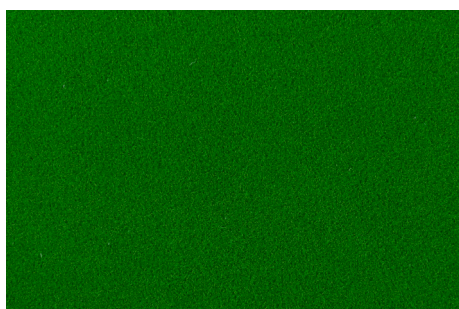

6613
Gras
2 m - 4 m

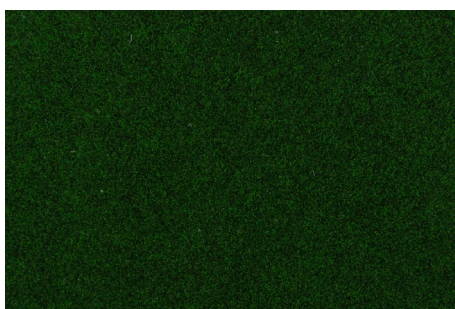

6655
Groen
2 m - 4 m