

IMPACT NOVA

XL

Technical specifications | Technische Daten | Spécifications techniques

Manufacturing technique Herstellungstechnik Technique de fabrication		1/12 Loop Pile
Pile composition Material der Nutzschicht Composition du velours		100% PA SDN
Secondary backing Rückenausstattung Dossier		Weaveback
Width Breite Largeur		400 cm
Roll length Rollenlänge Longeur du rouleau		25 lm
Pile height Polhöhe Hauteur du velours	ISO 1766	4,5 mm
Pile weight Polgewicht Poids du velours		730 gr/m ²
Total height Gesamthöhe Hauteur totale	ISO 1765	7,1 mm
DOP Nr / DOP n°		1087# 219001/IPN/WI

Total weight Gesamtgewicht Poids total	ISO 8543	1856 g/m ²
Number of tufts Noppenzahl Nombre de points	ISO 1763	227000
Fastness to rubbing (dry) Reibechtheit (trocken) Solidité au frottement (sec)	ISO 105 X12	3-4
Fastness to rubbing (wet) Reibechtheit (nass) Solidité au frottement (humide)	ISO 105 X12	3
Water fastness Wasserechtheit Solidité à l'eau	ISO 105 E01	4
Fastness to light Lichtechtheit Solidité à la lumière	ISO 105 B2	5
Thermal resistance Wärmedurchlasswiderstand Résistance thermique	ISO 8302	0,1 m ² K/W
Impact sound insulation Trittschalldämmung Réduction de la transmission du bruit de choc	ISO 140 - 8	25dB



Décision de reconduction n°18/319

CARUS®

BIG Floorcoverings nv
Rijksweg 442
B-8710 Wielsbeke - Belgium


Showroom
Boffonstraat 3
B-8710 Wielsbeke - Belgium

www.carusflooring.com
carus@bintg.com
T +32 (0)56 67 42 11 - F +32 (0)56 67 48 30


IMPACT NOVA

Colours | Farben | Couleurs


XL

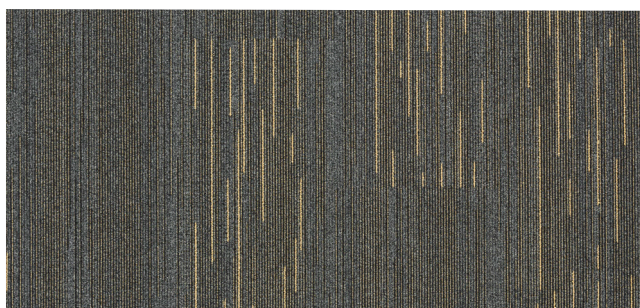

4013 (200 x 364 cm)

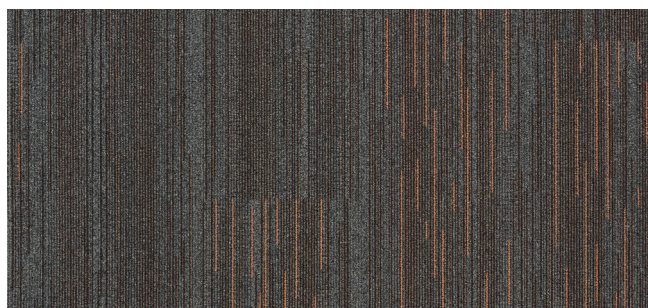

4015 (200 x 364 cm)

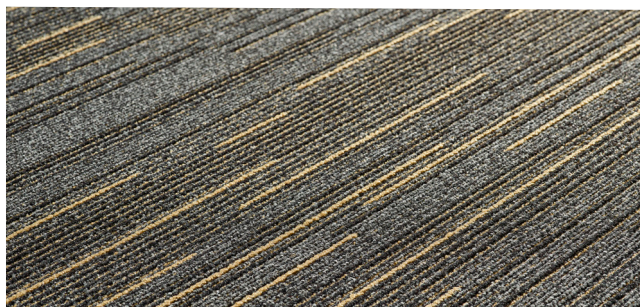

4013 - detail



4015 - detail

CARUS®

BIG Floorcoverings nv
Rijksweg 442
B-8710 Wielsbeke - Belgium

Showroom
Boffonstraat 3
B-8710 Wielsbeke - Belgium

www.carusflooring.com
carus@bintg.com
T +32 (0)56 67 42 11 - F +32 (0)56 67 48 30