

# IMPACT PATINA

# XL

Technical specifications | Technische Daten | Spécifications techniques

|                                                                            |                       |
|----------------------------------------------------------------------------|-----------------------|
| Manufacturing technique<br>Herstellungstechnik<br>Technique de fabrication | 1/12 Loop Pile        |
| Pile composition<br>Material der Nutzschicht<br>Composition du velours     | 100% PA SDN           |
| Secondary backing<br>Rückenausstattung<br>Dossier                          | Weaveback             |
| Width<br>Breite<br>Largeur                                                 | 400 cm                |
| Roll length<br>Rollenlänge<br>Longeur du rouleau                           | 25 lm                 |
| Pile height<br>Polhöhe<br>Hauteur du velours                               | ISO 1766 4,5 mm       |
| Pile weight<br>Polgewicht<br>Poids du velours                              | 800 gr/m <sup>2</sup> |
| Total height<br>Gesamthöhe<br>Hauteur totale                               | ISO 1765 7,1 mm       |
| DOP Nr / DOP n°                                                            | 1087# 219003/IPP/WI   |

|                                                                                                   |             |                        |
|---------------------------------------------------------------------------------------------------|-------------|------------------------|
| Total weight<br>Gesamtgewicht<br>Poids total                                                      | ISO 8543    | 1990 g/m <sup>2</sup>  |
| Number of tufts<br>Noppenzahl<br>Nombre de points                                                 | ISO 1763    | 227000                 |
| Fastness to rubbing (dry)<br>Reibechtheit (trocken)<br>Solidité au frottement (sec)               | ISO 105 X12 | 3-4                    |
| Fastness to rubbing (wet)<br>Reibechtheit (nass)<br>Solidité au frottement (humide)               | ISO 105 X12 | 3                      |
| Water fastness<br>Wasserechtheit<br>Solidité à l'eau                                              | ISO 105 E01 | 4                      |
| Fastness to light<br>Lichtechtheit<br>Solidité à la lumière                                       | ISO 105 B2  | 5                      |
| Thermal resistance<br>Wärmedurchlasswiderstand<br>Résistance thermique                            | ISO 8302    | 0,1 m <sup>2</sup> K/W |
| Impact sound insulation<br>Trittschalldämmung<br>Réduction de la transmission<br>du bruit de choc | ISO 140 - 8 | 25dB                   |



CARUS®

BIG Floorcoverings nv  
Rijksweg 442  
B-8710 Wielsbeke - Belgium


Showroom  
Boffonstraat 3  
B-8710 Wielsbeke - Belgium

www.carusflooring.com  
carus@bintg.com  
T +32 (0)56 67 42 11 - F +32 (0)56 67 48 30


# IMPACT PATINA

Colours | Farben | Couleurs

# XL

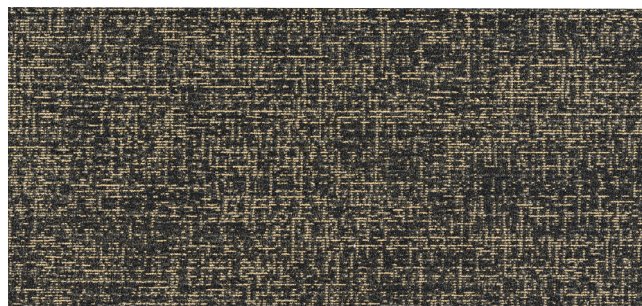

4012 (200 x 363 cm)

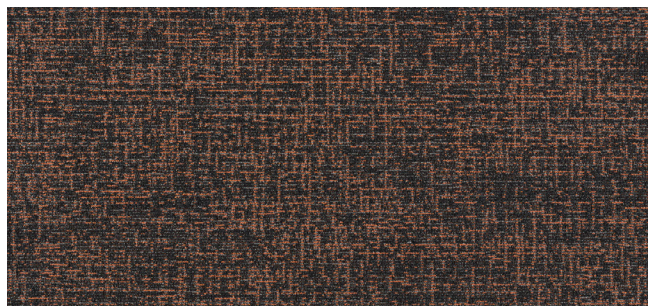

4014 (200 x 363 cm)



4012 - detail



4014 - detail

## CARUS®

BIG Floorcoverings nv  
Rijksweg 442  
B-8710 Wielsbeke - Belgium

Showroom  
Boffonstraat 3  
B-8710 Wielsbeke - Belgium

[www.carusflooring.com](http://www.carusflooring.com)  
[carus@bintg.com](mailto:carus@bintg.com)  
T +32 (0)56 67 42 11 - F +32 (0)56 67 48 30