



Beaulieu
International
Group

Needle Felt

ISO 9001: 2015 CERTIFIED
ISO 14001: 2015 CERTIFIED

COLLECTION AUSSIE RAIL




Pile content	Polmaterial	Composition des fibres	-	100% PP
Surface aspect	Oberflächenstruktur	Aspect du surface	-	Rib
Backing	Rücken	Dossier	ISO 2424	Resine
Pile weight	Polgewicht	Poids des fibres	ISO 8543	900 gr/m²
Total weight	Gesamtgewicht	Poids total	ISO 8543	1045 gr/m²
Pile height	Polhöhe	Hauteur du velours	ISO 1765	4 mm
Total height	Gesamthöhe	Hauteur totale	ISO 1765	9 mm
Roll length	Länge	Longueur	-	30 m
UV stability	UV-Stabilität	Stabilité UV	-	5000 hours

CONTACT

Sales.BFSEurope@bintg.com
www.beaulieu-needlefelt.com

We reserve the right to alter technical specifications. Protection foil is not suitable in humid conditions.
© Beaulieu International Group


AUSSIE RAIL

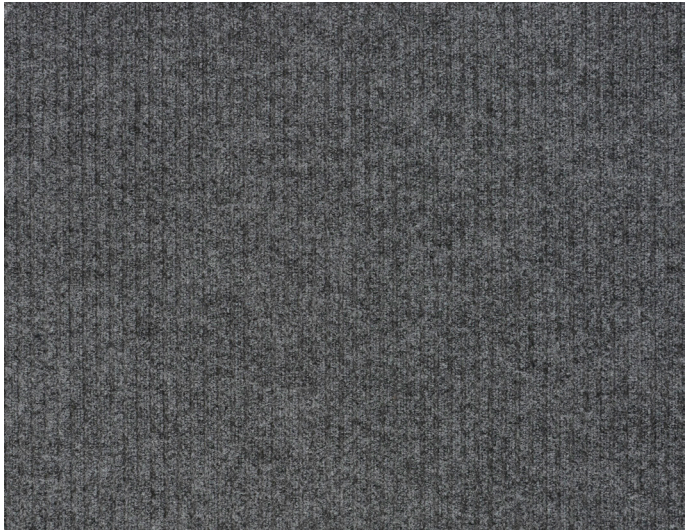


2081
Dark Grey
2 m



2236
Antraciet
2 m

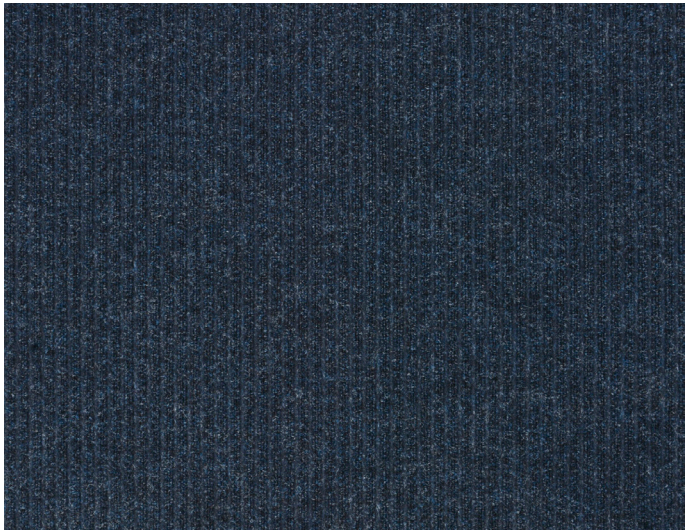

5018
Ombre
2 m

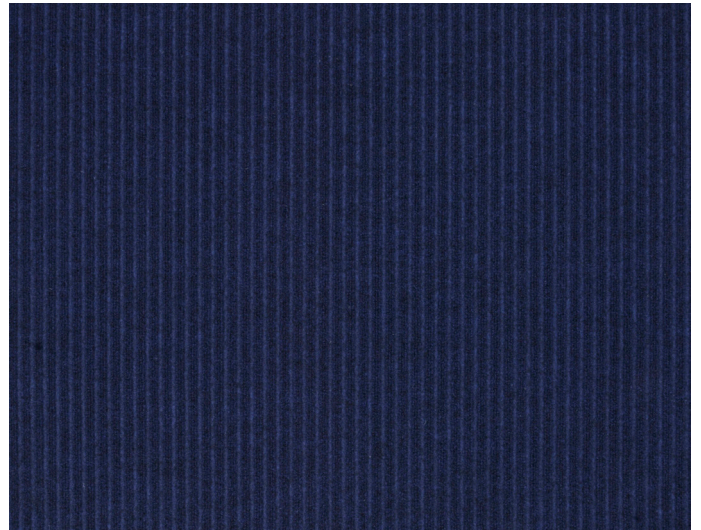

5038
Cobalt
2 m



7011
Cacao
2 m