

Product Information

| | | | | | |
|------------------|-----------------------|--|--|------------------|--|
| Norm | EN ISO 26986 | | | | * check individual ref. for available widths |
| Intensity of use | ISO 10874 (EN 685) | | 23 Domestic heavy 32 Commercial general 41 Industrial moderate | class | |
| Total Thickness | EN ISO 24346 (EN 428) | | 2,00 | mm | |
| Wearlayer | EN ISO 24340 (EN 429) | | 0,50 | mm | |
| Abrasion group | EN 660-2 | | T | class | |
| Total weight | EN ISO 23997 (EN 430) | | 1600 | g/m ² | |
| Standard width | EN ISO 24341 (EN 426) | | 2 - 3 - 4 * | m | |
| Standard length | EN ISO 24341 (EN 426) | | +/- 30 | m | |

Technical Information

| | | | | |
|--|-------------------------|--|-------------------------|--------------------|
| Dimensional stability | EN ISO 23999 (EN 434) | | ≤ 0,40 | % |
| Curling | EN ISO 23999 | | ≤ 8 | mm |
| Light stability | EN ISO 105 B02 | | ≥ 6 | degree |
| Residual indentation | EN ISO 24343-1 (EN 433) | | ≤ 0,20 | mm |
| Impact sound improvement | EN ISO 717/2 | | Δ Lw 10 | dB |
| Dynamic coefficient of friction | EN 13893 | | > 0,6 | |
| Slip resistance (ramp test with oil) | DIN 51130 | | R10 | scale |
| Reaction to fire Report number ---- VNLf 031380.4 | EN 13501-1 | | Bfl-s1 | class |
| Underfloor heating | EN 12667 | | Suitable | |
| Thermal resistance | ISO 8302 | | 0,015 | m ² K/w |
| Thermal conductivity | EN 12524 | | 0,13 | W/(m.K) |
| Chemical resistance / effect of stains | ISO 26987 (EN 423) | | resistant | |
| Static Electrical Propensity | EN 1815 | | < 2kV | On concrete |
| Determination of peel resistance | EN ISO 24345 | | ≥50N/50mm | |
| Furniture leg resistance | EN ISO 16581 | | no damage | |
| Castor chair resistance | EN ISO 4918 | | Suitable (type wheel H) | |

Environment



100% Recyclable.

- No heavy metals
- No solvents
- No Formaldehydes
- No harmful plasticizers



E1 means that the level of formaldehyde is inferior to 0.1ppm (= 0.12 mg/m³ of air)

This is illustrative by the choice of raw materials, of partners, of transport and of fabrication processes. Our selection of core materials is based on a combination of our clients' requirements for a quality product as well as requirements for a minimal impact on the environment. We are the leaders in terms of the implementation of clean renewable energy sources and we actively work towards the constant improvement of energy saving.



Our products are classified as A+ for the emission of volatile substances in inside air (compulsive sanitary labelling in France since January 2012)




100% phthalate free
*for all products produced from May 2017 onwards



Product Build

1. PU lacquer
2. Wear layer
3. Design layer
4. Foam layer
5. Impregnation layer
6. Glass fibre interlayer
7. Backing

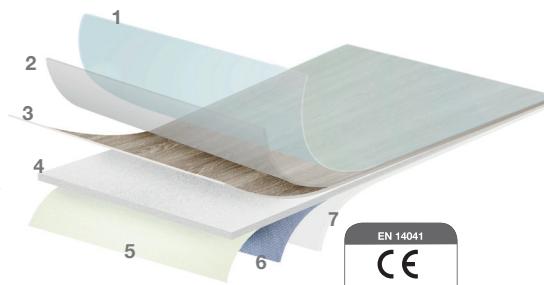

Features

