



Beaulieu  
International  
Group

Needle Felt

ISO 9001: 2005 CERTIFIED  
ISO 14001: 2005 CERTIFIED

# COLLECTION EXPOTOP



Backing	Rücken	Dossier	ISO 2424	PVC
Total weight	Gesamtgewicht	Poids total	ISO 8543	1350 gr/m <sup>2</sup>
Roll length	Länge	Longueur	-	30 m
Wear layer	Nutzschicht	Couche d'usure	-	0,20 mm
Total thickness	Gesamtdicke	Épaisseur totale	-	2,4 mm
Light stability	Lichtstabilität	Stabilité à la lumière	-	> 6
Dimensional stability	Dimensionsstabilität	Stabilité dimensionnelle	-	< 0,40%
Underfloor heating	Fußbodenheizung	Chauffage au sol	-	suitable
Residual indentation	Resteindrückung	Indetation résiduelle	-	< 0,35 mm
Slip resistance	Rutschklasse	Résistance au glissement	EN 13893	R10


## CONTACT

Sales.BFSEurope@bintg.com  
www.beaulieu-needlefelt.com

Colours may slightly vary from batch to batch. Characteristics in line with EN 1307 standards.  
We reserve the right to alter technical specifications.  
Protection foil is not suitable in humid conditions.  
© Beaulieu International Group



# EXPOTOP

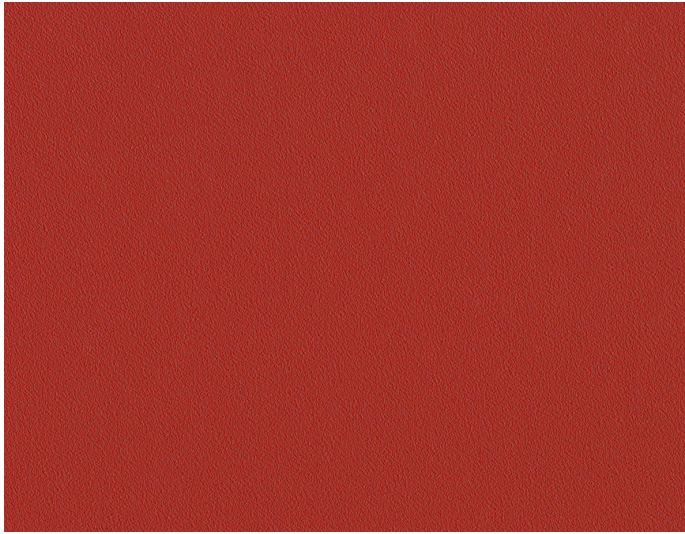


0711  
Red  
2 m




0834  
Dark Blue  
2 m




0910  
Light Grey  
2 m

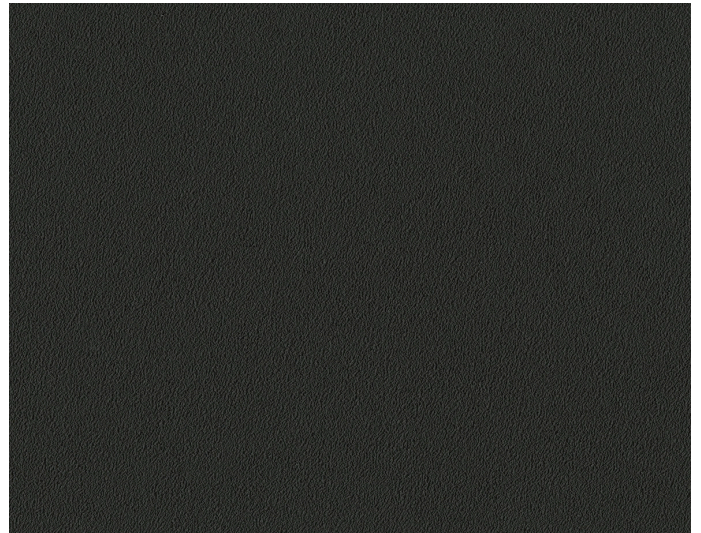

0955  
Black  
2 m

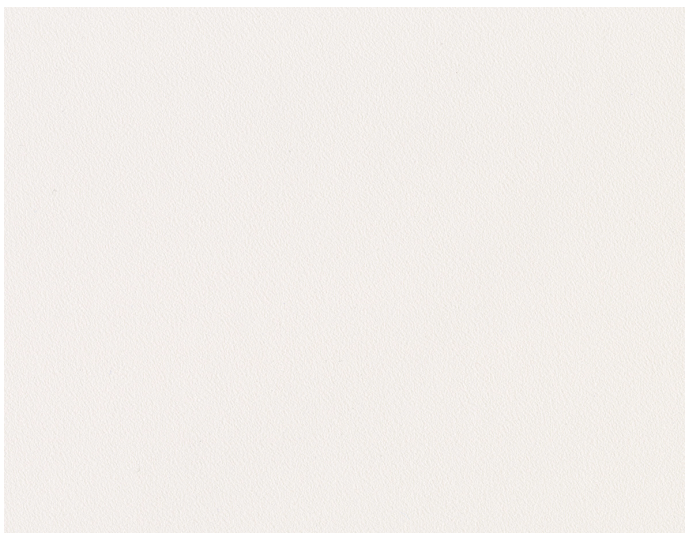

1010  
White  
2 m - 4 m

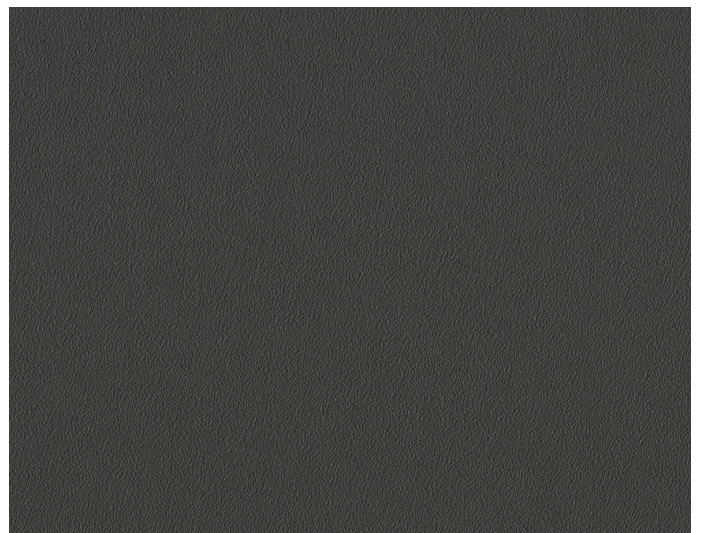

2098  
Antracite  
2 m