



Beaulieu
International
Group

Needle Felt

ISO 9001: 2015 CERTIFIED
ISO 14001: 2015 CERTIFIED

COLLECTION HONG KONG



Pile content	Polmaterial	Composition des fibres	-	100% PP
Surface aspect	Oberflächenstruktur	Aspect du surface	-	Structured
Backing	Rücken	Dossier	ISO 2424	Gel
Pile weight	Polgewicht	Poids des fibres	ISO 8543	1500 gr/m²
Total weight	Gesamtgewicht	Poids total	ISO 8543	2185 gr/m²
Pile height	Polhöhe	Hauteur du velours	ISO 1765	4,5 mm
Total height	Gesamthöhe	Hauteur totale	ISO 1765	10 mm
Roll length	Länge	Longueur	-	25 m
UV stability	UV-Stabilität	Stabilité UV	-	1500 hours

CONTACT

Sales.BFSEurope@bintg.com
www.beaulieu-needlefelt.com

We reserve the right to alter technical specifications. Protection foil is not suitable in humid conditions.
© Beaulieu International Group

HONG KONG




1099
Sisal
2 m



1153
Beige
2 m



1199
Kokos
2 m

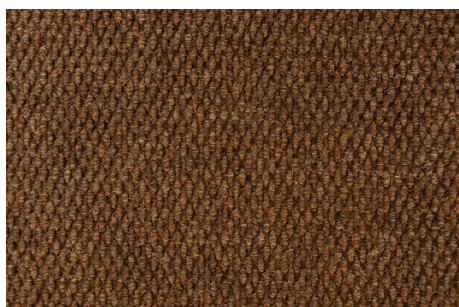

1244
Mustang
2 m



2098
Antracite
2 m - 4 m



2191
Charcoal
2 m



2343
Jet Black
2 m - 4 m




2531
Steel
2 m



3353
Rood
2 m



5154
Crown Blue
2 m

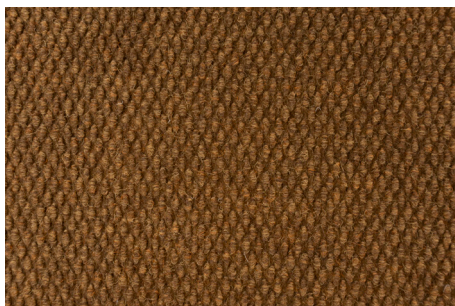

7006
Oak
2 m



7097
Tabacco
2 m