

Gauge	1/10
Manufacturing	Precision
Pile description	PP Tristar
Primary backing	Non-woven
Pile weight	650 gr/m ²
Number of tufts	157.480 /m ²
Secondary backing	Weaveback
Width	400 cm
Total weight	1660 gr/m ²
Total height	6,2 mm
Pile In/Out	In
Roll length	30 m
DOP	1087#22000./TDT/WI
Fire classification	Cfl-s1
Use classification	22
TOG rating	1,1

Available colours Weaveback | 400 cm 131 | 140 | 151 | 158 | 315 | 319 | 962 | 963 | 989 | 995 |

Colour legend	131	Castlerock	140	Ash	151	Mouse
	158	Anthracite	315	Pepper	319	Berber
	962	Teak	963	Coffee	989	Truffle
	995	Coconut				

6F0C35E1

www.pro-dis.info



EN 14041

NB: 0493
For use as floor covering in buildings.

DOP: 1087#22000./TDT/WI
 B.I.G. Floorcoverings nv
 Rijksweg 442
 B - 8710 Wielsbeke


EN 14041

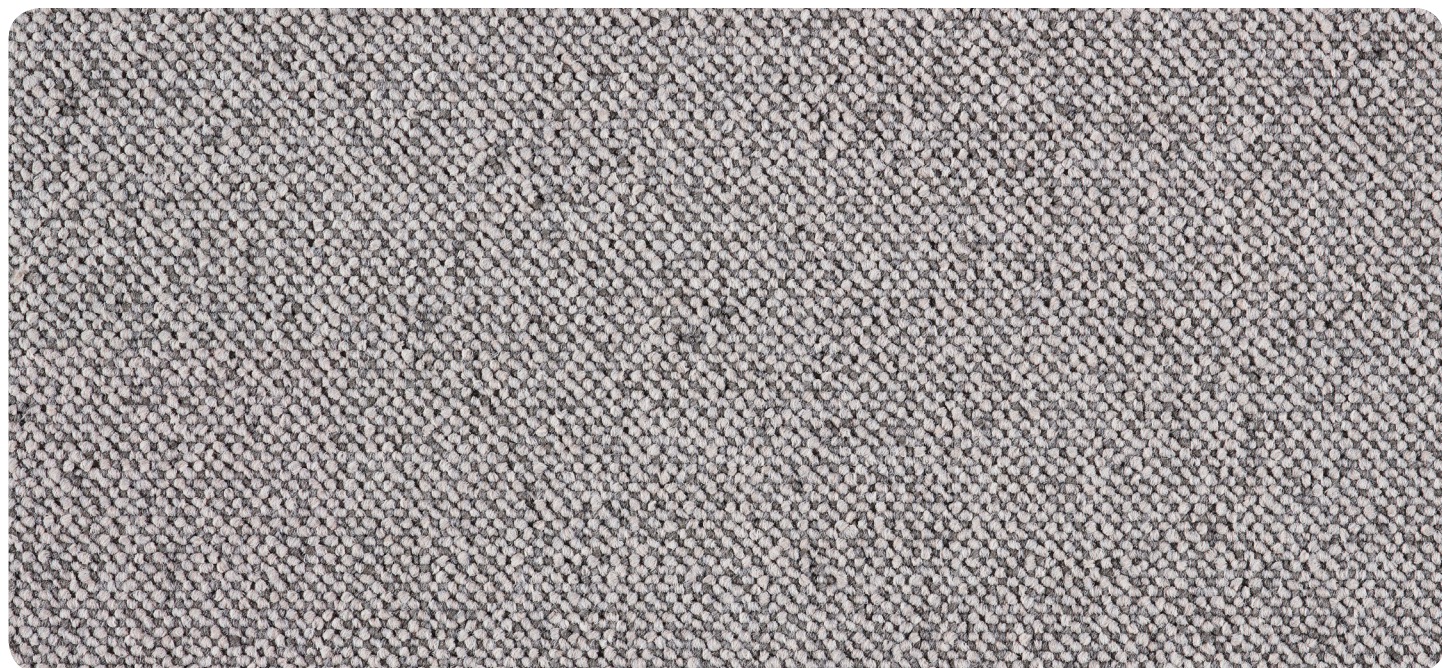

EN 1307

ÉMISSIONS DANS L'AIR INTÉRIEUR


These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to modify technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching can not be guaranteed. In cut-pile carpeting, in rare cases, shading/pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet.

BIG Floorcoverings nv Rijksweg 442 | 8710 Wielsbeke - Belgium | T +32 (0)56 67 42 11 | F +32 (0)56 67 48 40 | www.ideal-bintg.com

18.08.2020 | ISO N090N02/2/01-01-10



131 - 400 cm



140 - 400 cm



151 - 400 cm



158 - 400 cm



315 - 400 cm



319 - 400 cm



962 - 400 cm



963 - 400 cm



989 - 400 cm



995 - 400 cm