

Versjon: 8/01/2021

	innhold	m ²	vekt
1 pakke Pure planker	8 planker	2.16 m ²	12.5 kg
1 pall Pure planker	56 pakker	120.96 m ²	700 kg
1 pakke Pure fliser	6 fliser	2.25 m ²	12.97 kg
1 pall Pure fliser	28 pakker	63 m ²	363 kg





produktspesifikasjoner

			planker	fliser
Dimensjon (l x b)	EN ISO	24346	1326 x 204 mm	612 x 612 mm
Total tykkelse	EN ISO	24346	5 mm	
Slitesjikt	EN ISO	24340	0,55 mm	
Total vekt	EN ISO	23997	5.61 kg/m ²	
Overflatebehandling			PUR	
Klassifisering	EN ISO	10582	23-33	
Garanti i boliger			Livstid	
Garanti i offentlig miljø	EN ISO	10874	10 år	

testresultater

Gulvvarme	EN ISO	12524	Egnet for maks. 27 °C - Elektriske gulvvarmesystemer med maks. 60 W/m ²
Kontorstoltest	EN ISO	4918	Bestått
Brannklasse	EN ISO	13501-1	Bfl-s1
Kjemikaliermotstand	EN ISO	26987	OK
Termisk resistens	EN ISO	8302	0,0315 m ² K/W
Statisk inntrykk	EN ISO	24343-1	< 0,10 mm
Sklisikkerhet	DIN	51130	R10
	EN ISO	13893	Klasse DS
RRL pendeltest: tørr	CEN/TS	15676	76
RRL pendeltest: våt	CEN/TS	15676	50
Trinnlydsdemping	EN ISO	717-2	10 dB
Reflektert trinnlyd (romlyd)	EN ISO	16205	80 dB
Lysekthet	EN ISO	105-B02	>6
Dimensjonsstabilitet	EN ISO	23999	≤ 0,15 %
Antistatisk	EN ISO	1815	Ja
Formaldehyd emisjon	EN ISO	717-1	E1
VOC emisjon			Indoor air comfort GOLD



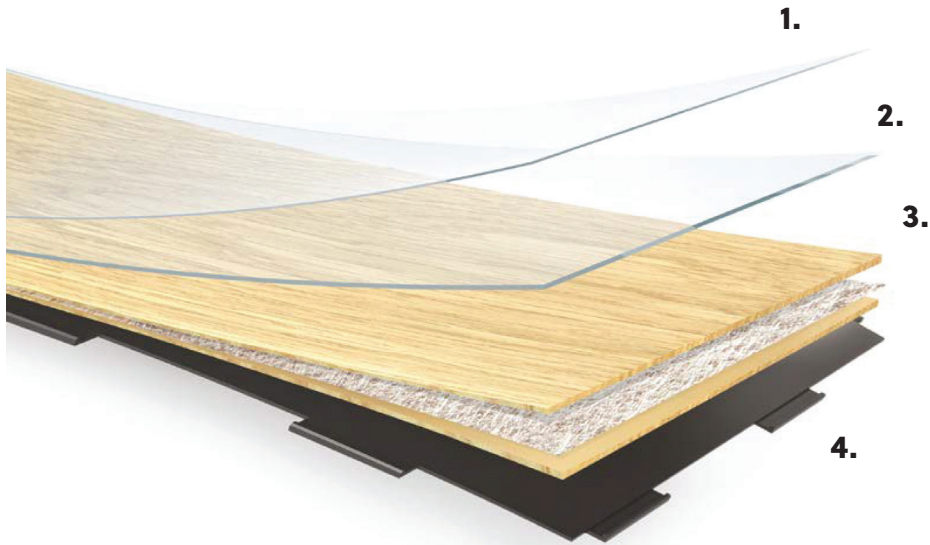

- 1. Beskyttende PU lakk
- 2. Slitesjikt 0,55 mm
- 3. Akustisk dekorvinylsjikt (glassfiberforsterket)
- 4. Stiv komposittkjerne (RCB) med DreamClick låselement